


FIXED LOUVRE PRODUCT & ORDERING GUIDE: METRIC

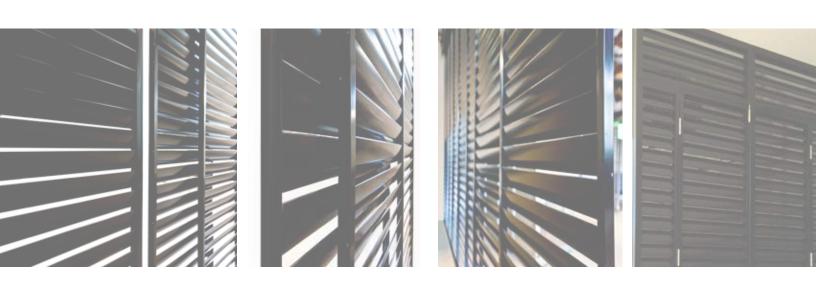

TWO GUIDELINES

Orders that are released to TWO are processed in the most timely manner possible. As such, any changes made to an order once it is released to TWO cannot be guaranteed to be applied if the order is already in production. Initial costs, cancellations or any change costs will be the responsibility of the dealer to cover.

All drawings, notes and emails with questions must be answered before an order is entered in to the production line. Delays in the timely processing of these by customers will lead to longer lead times.

All factory/freight repairs are to have photographic/video proof. If neither are available at the time of placing the repair, it will be processed as a dealer responsibility. TWO will credit back the cost of the repair once proof of factory/freight responsibility is given.

For special request/non-standard/limited availability items please check first with Head Office for availability. Any surcharges for these items will be the responsibility of the dealer to cover, even if it is not listed on the price list.

PDF Estimates generated from the system may not reflect final pricing. If all items are not selected in the order form, or details are added to the notes section that may alter the price.

All dealers are responsible for having the most current price lists and product manuals. If unsure please contact your sales representative to confirm.

COLOUR OPTIONS

There are four standard powdercoat finishes (40% sheen) available for the Weatherwell Fixed Louvres range.



CUSTOM COLOUR FINISH


Choose from one of the many colours offered by Dulux. Please be sure to select from the below pictured specifier for accurate colour matching "to deck".



Please Note: Custom colour finishes are applied as a powdercoat. Blade end caps will be colour matched to the custom colour selected.


Powdercoat finishes will be applied with a standard satin finish at 40% sheen. For custom sheen finishes e.g. matte or gloss, surcharges will apply.


BLADE

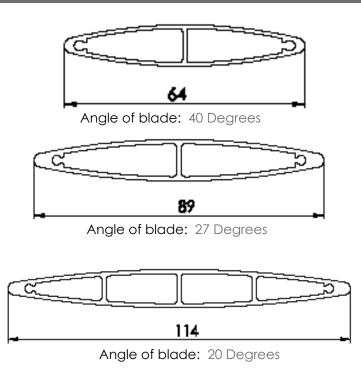


2.8 MM STILE

30 MM STILE

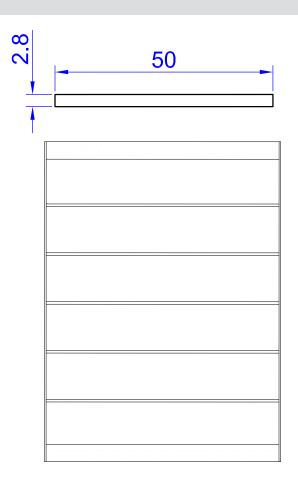

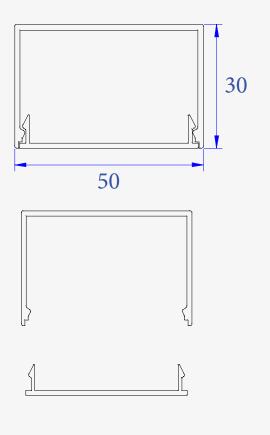

INSTALLATION METHOD: FIXED IN CHANNEL

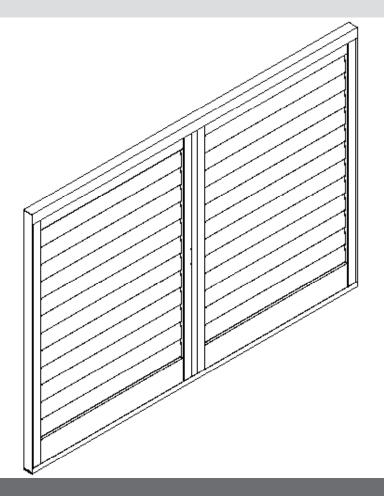

BEFORE YOU ORDER:

WARRANTY LIMITS

| Installation Method | Min Width | Max Width | Max Width Non-Warranty | Min Height | Max Height | Max Height Non-Warranty |
|---------------------|-----------|-----------|---------------------------|------------|------------|----------------------------|
| Fixed | 200 | 1500 | 1600 | 400 | 3600 | N/A |


AVAILABLE MOUNTS

| Reveal (In) Mount | Face (Out) Mount |
|-------------------|------------------|
| Yes | No |

AVAILABLE STILE SIZES


| 2.8mm Stile | 30mm Stile |
|-------------|------------|
| No | Yes |

TOP CHANNEL

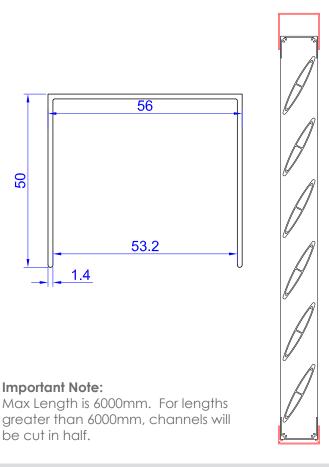


LANGLE

25x25 angle is supplied when 'U Channel with Angle Front Only' is selected at ordering. 25x10 angle is supplied when 'U Channel with Angle Front & Back' is selected at ordering.

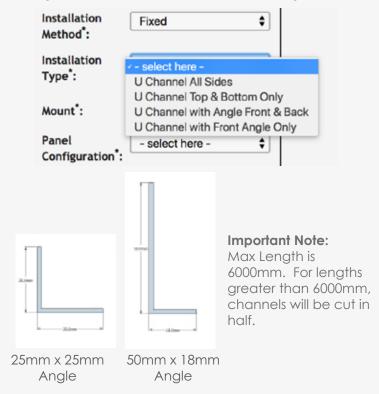

BOTTOM CHANNEL

The bottom channel is designed with foot holdings to offer a shelf when inserting the panel in to the channel.




Important Note:

Max Length is 6000mm. For lengths greater than 6000mm, channels will be cut in half.

T SECTION

T Section is used to conceal the join between each panel offering a seamless transition between panels. T Section is notated as a "T" in panel configurations.




Important Note:

Max Length is 6000mm. For lengths greater than 6000mm, channels will be cut in half.

PANEL CONFIGURATIONS

| Drawing | Panel Configuration Code |
|---------|--------------------------------|
| | F - 1 |
| | FTF - 2 |
| | FTFTF - 3 |
| | FTFTFTF - 4 |

INSTALLATION METHOD: SLIDING

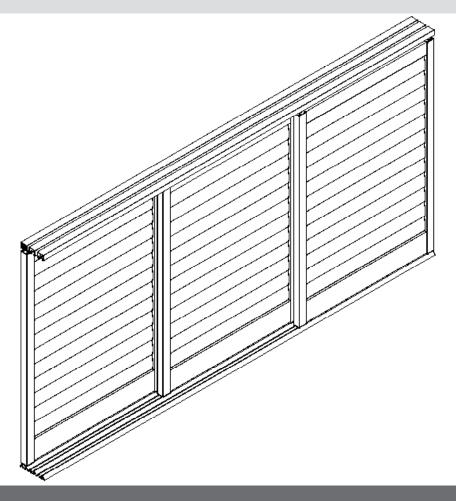

BEFORE YOU ORDER:

WARRANTY LIMITS

| Installation Method | Min Width | Max Width | Max Width Non-Warranty | Min Height | Max Height | Max Height Non-Warranty |
|---------------------|-----------|-----------|---------------------------|------------|------------|----------------------------|
| Sliding | 200 | 1500 | 1600 | 400 | 3600 | N/A |

AVAILABLE MOUNTS

| Reveal (In) Mount | Face (Out) Mount |
|-------------------|------------------|
| Yes | No |

AVAILABLE STILE SIZES


| 2.8mm Stile | 30mm Stile |
|-------------|------------|
| No | Yes |


01. PRODUCT KNOWLEDGE

TOP TRACK

DOUBLE SIDED FASICA INSTALLATION OPTION 1

Available Mounts - Reveal (In).



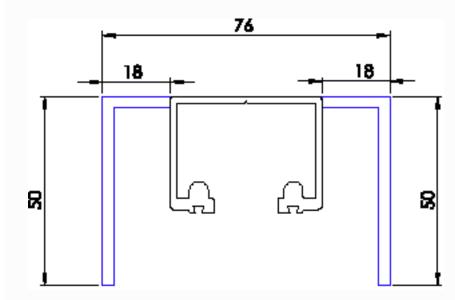


Important Note:


Max Length is 6000mm. For lengths greater than 6000mm, tracks will be cut in half.

BOTTOM TRACK

DOUBLE SIDED FASICA INSTALLATION OPTION 2

Available Mounts - Reveal (In).





Recessed Bottom Track (7014)


46 18 18 8 8

Important Note:

Max Length is 6000mm. For lengths greater than 6000mm, tracks will be cut in half.

PANEL CONFIGURATIONS

| Drawing | Panel Configuration Code |
|---------|--------------------------------|
| | 1 Track S - 1 |
| | 1 Track SS - 2 |
| | 2 Tracks BF - 2 |
| | 2 Tracks FB -2 |
| | 2 Tracks BFB - 3 |

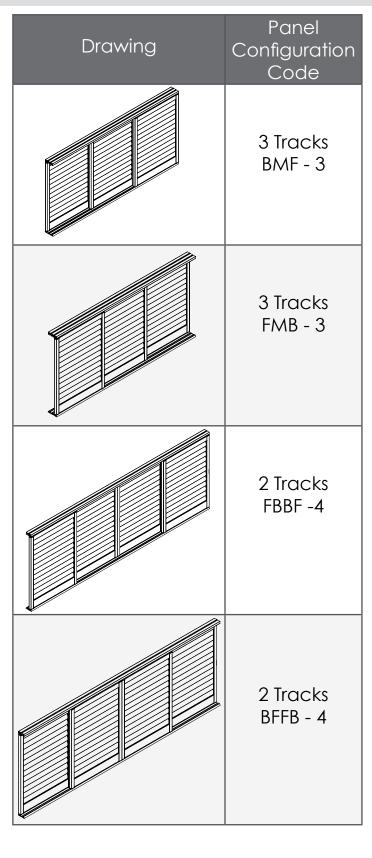

EXTRAS

STAND OUT BRACKET





Ordering Note:

As standard these will come at the width ordered top and bottom, however please advise the projection from the wall in the notes when ordering.


Available Colours:

Powdercoated to match.


Installation Type:

Currently only available for a Fixed in Top and Bottom U Channel installation type. Can be applied to other applications on request - please check with Head Office first.

Minimum width of Stand Out Bracket is 100mm. Max width is 600mm.

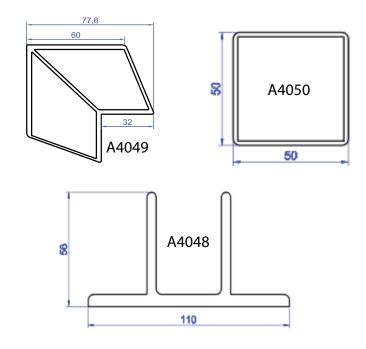

FLYSCREEN UNITS - FIBERGLASS

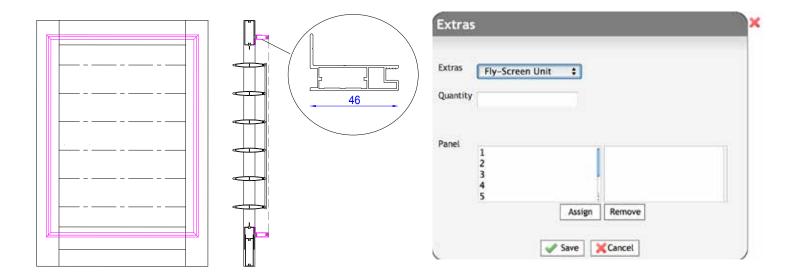


Available Installation Methods:

Fixed.

Available Colours:

Black

FLYSCREEN UNITS - ALUMINUM MESH (A9003)

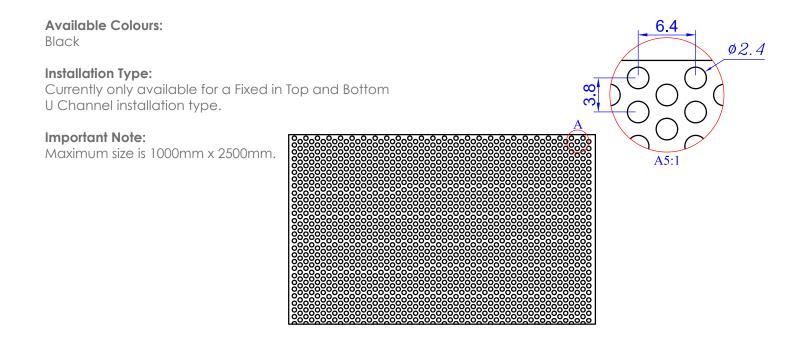

CUPBOARD CATCH

Designed to hold firmly and prevent doors swinging open during windy conditions. The catch is made from plastic and installed with a stainless steel screw (rust proof). No surcharge applicable.

This option will be supplied loose in order to prevent damage in transit.







SHAPED SHUTTERS

SLOPES LEFT & RIGHT

Available Installation Methods:


Fixed

Hinged in Frame

Important Note:


Blade(s) in the sloped section will be fixed, all other blades will be operable.

Please allow additional lead time for sloped shutter orders. If you are unsure if the shape is available for this product range, please contact your sales representative.



How To Order:

1. Click on the pencil for Shaped Shutter




2. Select Shape Type -Slope Left or Slope Right


| Shaped | Shutter | |
|------------|---------------------------|-------------|
| Shape Type | ✓ - select here - | |
| Height 2 | Slope Left Slope Right | llb) |
| | V | Save Cancel |

3. Enter Height 2 measurement



ANGLES



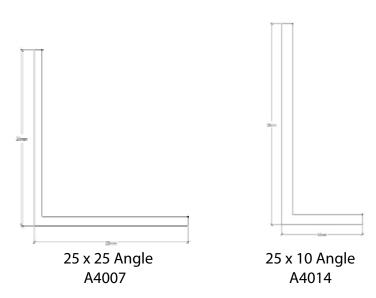


Available Colours:

Powdercoated to match.

Important Note:

Max Length is 6000mm. For lengths greater than 6000mm, angles will be cut in half.

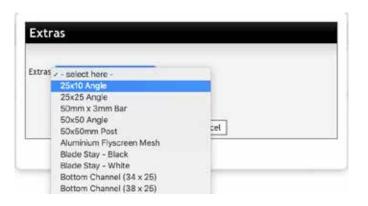



50 x 3 Flat Bar A4002

ORDERING GUIDE: ALL INSTALLATION METHODS

| Product*: | Weatherwell Fixed \$ | Color*: | Black. \$ | Pelmet/Tracks*: Double Sided Fasci \$ | Special Instructions | <i>∂</i> 🖨 |
|---------------------------|----------------------|--------------------------|---------------------|---------------------------------------|--------------------------------------|----------------------------|
| Location | Enter Location | Blade*: | 89mm Fixed Blade \$ | | Notes | |
| Width*: | Enter Width | Stiles*: | 30mm \$ | | | |
| Height [*] : | Enter Height | Installation Method*: | Sliding \$ | | Needs | No ○ Yes |
| Uneven Panel Widths | ○ No ® Yes | Installation Type*: | 2 Tracks ‡ | | Drawing*: Upload Drawing/Image | Choose File No file chosen |
| Sub Widths*: | Enter Sub-Width 1 | Mount*: | Reveal (In) ‡ | | Using Made2Fit Service | No file chosen |
| | Enter Sub-Width 2 | Configuration*: | BFB − 3 ‡ | | | |
| | Enter Sub-Width 3 | | | | | |
| 3 (2) | | | | | | |

The order form is divided in to four columns containing all the information needed to successfully order panels for any opening.

Column 1: This column is universal across all Installation Methods.


Columns 2 & 3: These two columns are specific to an Installation Method.

Column 4: This column is also universal across all Installation Methods, although there are Special Instructions that are more relevant to different Installation Methods.

| Installation Method | Column Number | Page Number |
|---------------------|---------------|-------------|
| Section 1 | 1 | 14 |
| Hinged No Frame | 2 | 15 -16 |
| Fixed | 2 | 17 -18 |
| Multi-Fold | 2 | 19 - 20 |
| Sliding | 2 | 21 - 22 |

| Icon | Function |
|------|--|
| 0 | This icon adds additional line items if available for a field. It also adds new line items to the order form. |
| | This icon removes added line items if too many are added and not needed. |
| 0 | This icon copies the majority of the details from the above line item to a new line item. |
| 0 | This icon allows you to add/ edit content in a light box e.g. blade stay. |

COLUMN 1

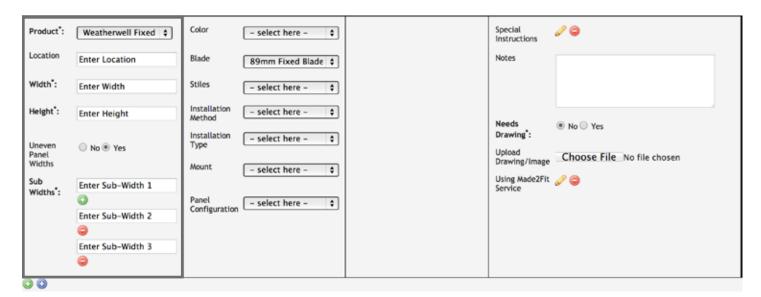

Step 1: Location: The Location field is for your line item reference for e.g. Master Bedroom.



Step 2: Width & Height: Enter the openings width and height in millimeters.

Note: You do not need to ender "mm" at the end of your measurements




Step 3: Uneven Panel Widths: If you require the panels in your panel configuration to be at specified widths select "yes".



Step 4: Sub-Widths: If there are multiple sub-widths select the for additional lines to appear. Select the to remove extra lines added.



FIXED: COLUMN 2

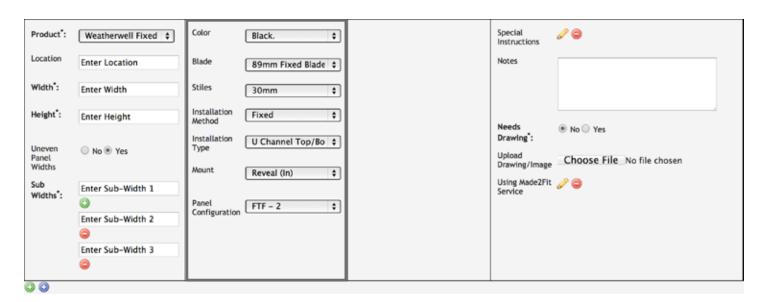

Step 5: Color: Select from one of the available colors.



Step 6: Blade: The 89mm blade is the only availabe blade size for this product range. It is the default selection.




Step 7: Stile Sizes: Select either the 2.8mm or 30mm stile.



Step 8: Installation Method: Fixed




Step 9: Installation Type: U Channel Top/Bottom Only or U Channel with 25 x 25 Angle.



Step 10: Mount: Reveal (In)




FIXED: COLUMN 2

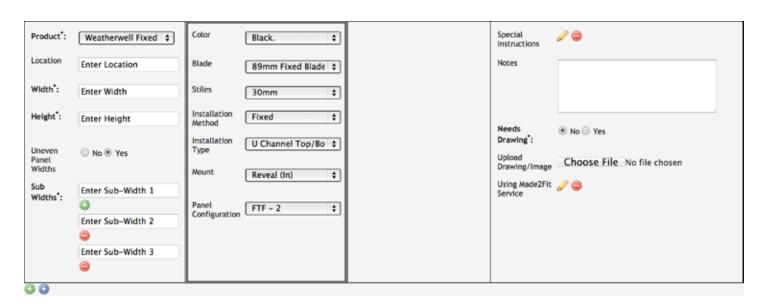

Step 11: Select the needed panel configuration. Refer to page 7 for available configurations).




SLIDING: COLUMN 2

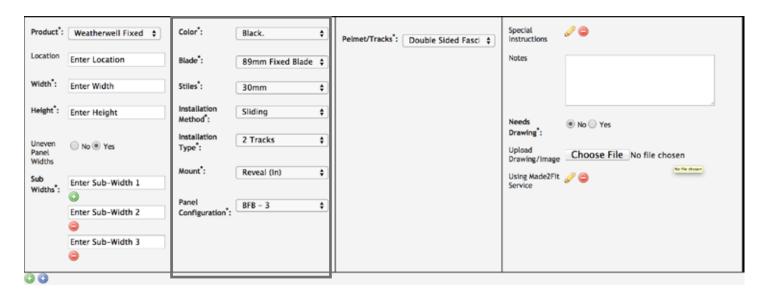

Step 5: Color: Select from one of the available colors.



Step 6: Blade: The 89mm blade is the only availabe blade size for this product range. It is the default selection.



Step 7: Stile Sizes: 30mm stile.



Step 8: Installation Method: Sliding



Step 9: Installation Type: 1 Track, 2 Tracks or 3 Tracks.




Step 10: Mount: Reveal (In)



20

SLIDING: COLUMN 2

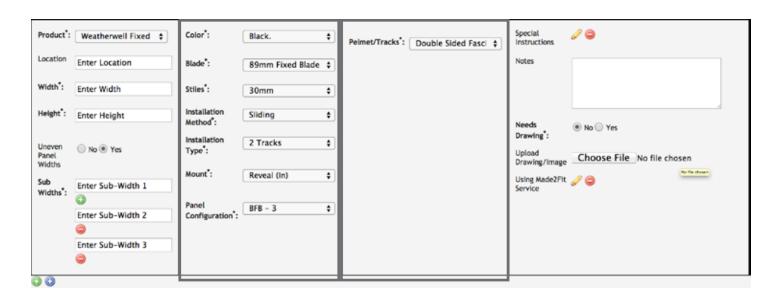

Step 11: Select the needed panel configuration. Refer to page 12 for available configurations).



Step 12: Pelmet/Tracks: Select either Double Sided Fascia or Track(s) Only.

